

MID-SIZE WALK-BEHIND MOWER

91CM SIDE DISCHARGE • FLOATING DECK



MID-SIZE

SHOWS UP TO WORK, SEASON AFTER SEASON

A great tool for landscape professionals, these durable, enhanced-productivity mowers are ideal for all hard to access areas. The engine orientation offers a stable method of operating on slopes and the floating deck makes it also suitable for finer turf applications. Its compact size means it can be transported in a commercial van.

- ✓ **PREVENT IMPACT DAMAGE** with TURBO FORCE® 7 gauge steel deck and welded bull-nose bumper.
- ✓ **ENHANCE DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ✓ **FINE-TUNE THE CUT** for different conditions or seasons with the patented adjustable baffle.
- ✓ **REDUCE FATIGUE** with straightforward twin-lever controls (hydro models) or Toro® exclusive T-Bar control system (gear drive models)
- ✓ **CHANGE HEIGHT-OF-CUT** easily with 4-pin adjustment.



30070 – T-BAR GEAR CONTROL

Exclusive 'T-Bar' control system is easy to learn and operate. Peerless 5-speed gear drive system with reverse. Hour meter fitted as standard.



30071 – T2 HYDRO CONTROL

Twin lever 'T2' control system with independent choke and throttle controls provide precise starting for operational control. Twin Hydro-gear pumps ensure smooth and easy operation with fast 8.0km/h forward speed. Hour meter fitted as standard.

MID-SIZE WALK-BEHIND MOWER

91CM SIDE DISCHARGE • FLOATING DECK



COMMERCIAL-GRADE ENGINES

Delivers many hours of trouble-free life. Twin cylinder design runs smoothly and delivers excellent load response.



FLAT-FREE CASTER TIRES

Eliminate time-consuming flats so mowers can spend more time in the field and less time in the shop.



RUBBER DISCHARGE CHUTE

Flexes to allow close trimming without damaging the chute or landscaping structures.



TURBO FORCE® DECK

Provides strength and durability with its' heavy-duty welded 7 gauge steel construction. A 13mm wear guard on the trim side of the deck and bull-nose bumper have been added for extra strength.

MODEL	30070 - GEAR	30071 - HYDRO
CUTTING WIDTH	91 cm	91 cm
ENGINE	Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled	Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled
STARTER	Recoil	Recoil
DRIVE SYSTEM	Peerless® 5-speed, with reverse	Twin Hydro-gear® pumps with Parker wheel motors
DECK TYPE	TURBO FORCE® Side Discharge, Recycler	TURBO FORCE® Side Discharge, Recycler
HOC	25 - 114mm	25 - 114mm
SPEED	Forward: 0 - 7.5 km/h; Reverse: 3.7 km/h	Forward: 0 - 8.0 km/h; Reverse: 3.2 km/h
FUEL/CAPACITY	Petrol / 18 litres	Petrol / 18 litres
WEIGHT	267 kg	303 kg

➤ = Enhanced or step-up feature

ACCESSORIES



SULKY

30109



OPERATOR CONTROLLED DISCHARGE CHUTE KIT

115-4510



DUAL WHEEL ASSEMBLY

02931

DUAL WHEEL HUB KIT

02930

CLEATED TYRE KIT

NARROW WHEEL KIT

Recommended when specifying 82cm deck with 30069.
Order 02932

MID-SIZE WALK-BEHIND MOWER

82CM, 91CM, OR 122CM • FIXED DECK

MID-SIZE

BUILT FOR POWER, BUILT TO LAST


This job is demanding enough. It's good to know there are some things you can count on. Like the way your Toro® mid-size mower stands up to punishing use, season after season. And the TURBO FORCE® cutting system that evenly disperses fine clippings for a flawless cut every time. With comfortable controls and gear or hydrostatic drive, you're well on your way to getting more done in a day.

- ✓ **PREVENT IMPACT DAMAGE** with TURBO FORCE 7 gauge steel deck and welded bull-nose bumper.
- ✓ **ENHANCE DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ✓ **REDUCE FATIGUE** with the industry-standard pistol grip controls.
- ✓ **FINE-TUNE THE CUT** for different conditions or seasons with the patented adjustable baffle.
- ✓ **MAXIMIZE PERFORMANCE** with commercially proven heavy-duty drive system.



MID-SIZE WALK-BEHIND MOWER

82CM, 91CM, OR 122CM • FIXED DECK

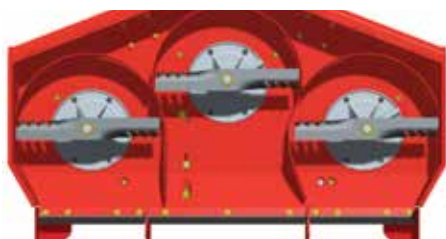

REAR DISCHARGE DECKS

Deliver unsurpassed strength with 7 gauge aluminium, a superior cut and increased productivity in extreme mowing conditions.



LONG RANGE FUEL TANK

Provides excellent operational range and offers high productivity through reduced downtime for refueling.



EASY HEIGHT OF CUT ADJUSTMENT

Provides cutting heights ranging from 25 to 108mm in 6mm increments with easy to change vertical pin height of cut system.



COMPACT REAR-DISCHARGE DECK OPTION

Combined with the optional Narrow Wheel Kit, reduces the mowers width to 84cm, enabling the mower to be used where access through gates or bollards is required.

MODEL	30069 HYDRO POWER UNIT
CUTTING WIDTH	82, 91 or 122 cm
ENGINE	Kawasaki®, 4-cycle, 603 cc, FS541V, OHV V-Twin
STARTER	Electric
DRIVE SYSTEM	Twin Hydro-gear® pumps with Parker® wheel motors
DECK TYPE	Rear Discharge or Flail
HOC	Rear Discharge: 25-108 mm; Flail: 12-140 mm
SPEED	Forward: 0 - 10 km/h; Reverse: 3.5 km/h
FUEL/CAPACITY	Petrol / 19 litres
WEIGHT	261 kg, 263 kg or 279 kg

REAR DISCHARGE DECKS	02710	02711	02712
WIDTH OF CUT	82cm	▶ 91cm	▶ 122cm
HEIGHT OF CUT	25 - 108 mm in 6 mm increments		
OPTIONAL ACCESSORIES	Narrow Wheel Kit (02932)	Dual Wheel Hub Kit (02931) - Cleated Tyre Kit (02930) - Tru-Trak Sulky Kit (30109)	
NET WEIGHT (W/ TRACTION UNIT)	261kg	263kg	279kg

▶ = Enhanced or step-up feature

OPTIONAL FLAIL ATTACHMENT

Designed for use in the most demanding conditions, the Flail attachment is the ideal choice for mowing rough, overgrown areas. The high quality welded-steel frame construction houses a robust 91cm flail rotor which is balanced to reduce vibration and ensure maximum operational time for the operator.



ROBUST FLAIL CONSTRUCTION

Robust 91cm wide 31cm diameter Flail rotor with 24 independent flail blades for effective cutting performance.

MODEL	02720 Flail
Width of Cut	91cm
Height of Cut	Infinitely variable between 12mm - 140mm
Optional Accessories	Dual Wheel Hub Kit (02931) - Cleated Tyre Kit (02930) - Tru-Trak Sulky Kit (30109)
Net Weight (w/ traction unit)	305kg