

LANDSCAPE CONTRACTOR EQUIPMENT RANGE





EXPERTS IN TURF CARE

Join the ranks of satisfied customers around the globe make Toro® the preferred name for your business.

On golf courses, parks, municipalities, sports fields and individual lawns around the world, our commitment to providing innovative, high quality products and systems to maintain turf has become legendary. From baseball diamonds in Toro's U.S. homeland, and Professional Football pitches around the world, to St. Andrews and Wimbledon Toro mowers are used to maintain some of the most prestigious grassed areas in the world.



Trusted by Professionals and Homeowners around the Globe

Learn more about Toro's History, Watch the video







INNOVATION

With well over 1500 patents related to turf maintenance, innovation is at the heart of Toro's success. Continued investment in R&D and new technologies make Toro® the preferred choice to all.



CUSTOMER CARE

Our global network of dealers and distributors is here to provide the best support to keep your equipment in peak condition. Visit toro.com/locate to find your nearest Toro dealer.

LEGACY OF EXCELLENCE

Since 1919, The Toro Company has built, tested and led innovative solutions to care for your turf. Today, Toro continues to lead by focusing on creating high performance, environmentally friendly solutions to help our customers around the world preserve the beauty, productivity and sustainability of the land.





TOUGH MACHINES FOR TOUGH JOBS

With commercial grade engines and up to 6mm thick cast aluminium decks, Toro® Proline mowers are designed to withstand the demanding conditions of professional gardeners and landscapers.



TUNNEL DESIGN

Reduces chance of plugging and more efficiently collects grass with its wide design and geometry.



ANTI-SCALP CUP

Protects the turf from scalping when mowing uneven surfaces. It also provides additional protection to blade bolts.



Makes quick work of grass clipping disposal and features an easy on/off design.



COMMERCIAL DECK

Withstands the abuse of commercial mowing with a 6mm thick die-cast aluminium deck, while minimalising overall weight.



POWERFUL COMMERCIAL ENGINE

Performs reliably in demanding conditions and has a replaceable spin-on oil filter for easy maintenance.



22293

For optimal performance and productivity, choose the new Proline Mower model 22293 with its maintenance-free 3-speed transmission, rugged tubular engine guard, steel skid plates on the deck, anti-scalp cup and more.





LONG RANGE FUEL TANK Saves time on re-fueling with a 3.8 litre fuel tank. (22293 only)



RECYCLER® TECHNOLOGY Features a front throw chamber and blade to lift, suspend and re-cut clippings into a fine mulch for a healthy, lush garden.

ACCESSORIES

REAR DISCHARGE KIT 130-9374

> **RECYCLING KIT** 125-5064

ENGINE GUARD 130-9700

MODEL	22291	22293
CUTTING WIDTH	53cm	53cm
ENGINE	Kawasaki®, 4-cycle, 179 cc, FJ180V	Kawasaki, 4-cycle, 179 cc, FJ180V
STARTER	Recoil	Recoil
DRIVE SYSTEM	Fixed speed, RWD	>3-speed, RWD
DECK TYPE	Recycler/Rear Bag Aluminum	Recycler/Rear Bag Aluminum
HOC	25mm – 114mm, 4 point	25mm – 114mm, 4 point
SPEED	0-6.0 km/h forward	0-6.0 km/h forward
FUEL/CAPACITY	Petrol / 1.8 litres	> Petrol / 3.8 litres
WEIGHT	50 kg	56 kg

> = Enhanced or step-up feature





FINISH THE JOB FASTER

The Toro® 76cm TurfMaster is in a class of its own. It covers more ground in less time than smaller models, yet is easy to handle. And every component from top to bottom is built for heavy use in rough conditions, from curbs to trailers to multiple operators. It's professional-grade toughness with a professional-quality of cut.



*Time Savings via wider cutting path and enhanced speed of TimeMaster vs. 53cm Toro mower, and will vary due to mowing conditions.



TWIN BLADE CUTTING SYSTEM

Increases contractor productivity as the 76cm wide deck and unique twin blade system offer savings of up to 40% on mowing time*.



BLADE BRAKE CLUTCH (BBC)

Stops the blade but enables the engine to continue running while emptying the grass bag or traveling over non-grassed areas.



HEAVY-DUTY COMPONENTS


Like deck skid side skirts, steel bull-nose front bumper, tough sealed transmission and a strong one-piece handle are designed for the demands of commercial mowing.



2-POINT HEIGHT OF CUT

Makes it easy to adjust deck height.

MODEL	22205TE TURFMASTER
CUTTING WIDTH	76 cm
ENGINE	Kawasaki, 4-cycle, 179 cc, FJ180V
STARTER	Recoil
DRIVE SYSTEM	Fixed Speed, RWD
DECK TYPE	Recycler/Rear Bag/Side Discharge Steel
HOC	38 mm - 127 mm, 2 point
SPEED	0-6.0 km/h forward
FUEL/CAPACITY	Petrol / 3.8 litres
WEIGHT	72 kg

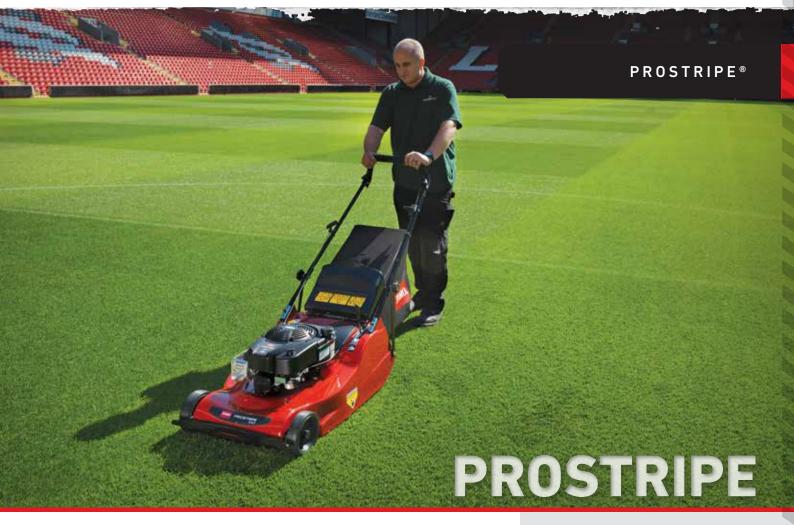



REAR ROLLER

Leaves a striped finish and ribbed profile provides added traction in damp conditions or rough terrain. With a split differential, turning is easy and won't damage the turf.



1-POINT HEIGHT OF CUT

Makes changing the height of cut quick and effortless with a spring assisted lever.



IMPROVED AIR FLOW

Provides superior collection with integrated front fins to ensure airflow from the deck to the bag.

MODEL	02656
CUTTING WIDTH	56 cm
ENGINE/MOTOR	Briggs & Stratton Series 850 OHV 190cc
DRIVE SYSTEM	Fixed Speed, RWD
STARTER	Recoil, ZS
HEIGHT OF CUT	1-point, 13-60
DECK TYPE	Aluminium
WEIGHT	51 kg

CLASSIC STRIPES FOR A PROFESSIONAL FINISH

Providing the perfect cut and elegant striped finish to any lawn area, the Toro® ProStripe 560 is the ideal choice for mowing formal lawns around pavilions, club houses and hotels.

Sports and golf applications – even residential gardens are no challenge for this high quality, versatile mower.



SHOWS UP TO WORK, SEASON AFTER SEASON

A great tool for landscape professionals, these durable, enhanced-productivity mowers are ideal for all hard to access areas. The engine orientation offers a stable method of operating on slopes and the floating deck makes it also suitable for finer turf applications. Its compact size means it can be transported in a commercial van.

- **→ PREVENT IMPACT DAMAGE** with TURBO FORCE® 7 gauge steel deck and welded bull-nose bumper.
- **✓ ENHANCE DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ✓ FINE-TUNE THE CUT for different conditions or seasons
 with the patented adjustable baffle.
- ✓ REDUCE FATIGUE with straightforward twin-lever controls (hydro models) or Toro® exclusive T-Bar control system (gear drive models)
- ✓ CHANGE HEIGHT-OF-CUT easily with 4-pin adjustment.



30070 - T-BAR GEAR CONTROL

Exclusive 'T-Bar' control system is easy to learn and operate. Peerless 5-speed gear drive system with reverse. Hour meter fitted as standard.



30071 - T2 HYDRO CONTROL

Twin lever 'T2' control system with independent choke and throttle controls provide precise starting for operational control. Twin Hydro-gear pumps ensure smooth and easy operation with fast 8.0km/h forward speed. Hour meter fitted as standard.

MID-SIZE WALK-BEHIND MOWER

91CM SIDE DISCHARGE • FLOATING DECK



COMMERCIAL-GRADE ENGINES

Delivers many hours of trouble-free life. Twin cylinder design runs smoothly and delivers excellent load response.



FLAT-FREE CASTER TIRES

Eliminate time-consuming flats so mowers can spend more time in the field and less time in the shop.



RUBBER DISCHARGE CHUTE

Flexes to allow close trimming without damaging the chute or landscaping structures.



TURBO FORCE® DECK

Provides strength and durability with its' heavy-duty welded 7 gauge steel construction. A 13mm wear guard on the trim side of the deck and bull-nose bumper have been added for extra strength.

MODEL	30070 - GEAR	30071 - HYDRO
CUTTING WIDTH	91 cm	91 cm
ENGINE	Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled	Kawasaki, 4-cycle, 603 cc, FS481V, Air-cooled
STARTER	Recoil	Recoil
DRIVE SYSTEM	Peerless® 5-speed, with reverse	Twin Hydro-gear® pumps with Parker wheel motors
DECK TYPE	TURBO FORCE® Side Discharge, Recycler	TURBO FORCE® Side Discharge, Recycler
НОС	25 - 114mm	25 - 114mm
SPEED	Forward: 0 - 7.5 km/h; Reverse: 3.7 km/h	Forward: 0 – 8.0 km/h; Reverse: 3.2 km/h
FUEL/CAPACITY	Petrol / 18 litres	Petrol / 18 litres
WEIGHT	267 kg	303 kg

> = Enhanced or step-up feature

ACCESSORIES



SULKY 30109



OPERATOR CONTROLLED DISCHARGE CHUTE KIT

115-4510



DUAL WHEEL ASSEMBLY

02931

DUAL WHEEL HUB KIT

02930

CLEATED TYRE KIT NARROW WHEEL KIT

Recommended when specifying 82cm deck with 30069. Order 02932



BUILT FOR POWER, BUILT TO LAST

This job is demanding enough. It's good to know there are some things you can count on. Like the way your Toro® mid-size mower stands up to punishing use, season after season.

And the TURBO FORCE® cutting system that evenly disperses fine clippings for a flawless cut every time. With comfortable controls and gear or hydrostatic drive, you're well on your way to getting more done in a day.

- ✓ PREVENT IMPACT DAMAGE with TURBO FORCE 7 gauge steel deck and welded bull-nose bumper.
- **✓ ENHANCE DURABILITY** with robust cast iron spindle housings with maintenance-free sealed bearings.
- ▼ REDUCE FATIGUE with the industry-standard pistol grip controls.
- ✓ FINE-TUNE THE CUT for different conditions or seasons
 with the patented adjustable baffle.
- ✓ MAXIMIZE PERFORMANCE with commercially proven heavy-duty drive system.





REAR DISCHARGE DECKS

Deliver unsurpassed strength with 7 gauge aluminium, a superior cut and increased productivity in extreme mowing conditions.




LONG RANGE FUEL TANK

Provides excellent operational range and offers high productivity through reduced downtime for refueling.



EASY HEIGHT OF CUT ADJUSTMENT

Provides cutting heights ranging from 25 to 108mm in 6mm increments with easy to change vertical pin height of cut system.



COMPACT REAR-DISCHARGE DECK OPTION

Combined with the optional Narrow Wheel Kit, reduces the mowers width to 84cm, enabling the mower to be used where access through gates or bollards is required.

MODEL	30069 HYDRO POWER UNIT
CUTTING WIDTH	82, 91 or 122 cm
ENGINE	Kawasaki®, 4-cycle, 603 cc, FS541V, OHV V-Twin
STARTER	Electric
DRIVE SYSTEM	Twin Hydro-gear® pumps with Parker® wheel motors
DECK TYPE	Rear Discharge or Flail
нос	Rear Discharge: 25-108 mm; Flail: 12-140 mm
SPEED	Forward: 0 - 10 km/h; Reverse: 3.5 km/h
FUEL/CAPACITY	Petrol / 19 litres
WEIGHT	261 kg, 263 kg or 279 kg

REAR DISCHARGE DECKS	02710	02711	02712
WIDTH OF CUT	82cm	▶91cm	▶122cm
HEIGHT OF CUT	25 - 108 mm in 6 mm i	ncrements	
OPTIONAL ACCESSORIES	Narrow Wheel Kit (02932)	Dual Wheel Hub Kit (02 (02930) - Tru-Trak Sulk	
NET WEIGHT (W/ TRACTION UNIT)	261kg	263kg	279kg

> = Enhanced or step-up feature

OPTIONAL FLAIL ATTACHMENT

Designed for use in the most demanding conditions, the Flail attachment is the ideal choice for mowing rough, overgrown areas. The high quality weldedsteel frame construction houses a robust 91cm flail rotor which is balanced to reduce vibration and ensure maximum operational time for the operator.





ROBUST FLAIL CONSTRUCTION

Robust 91cm wide 31cm diameter Flail rotor with 24 independent flail blades for effective cutting performance.

MODEL	02720 Flail
Width of Cut	91cm
Height of Cut	Infinitely variable between 12mm - 140mm
Optional Accessories	Dual Wheel Hub Kit (02931) - Cleated Tyre Kit (02930) - Tru-Trak Sulky Kit (30109)
Net Weight (w/ traction unit)	305kg



GET IN, GET DONE AND ON TO THE NEXT JOB FASTER

Rough bumps and challenging terrain are all in a day's work. Feeling them shouldn't have to be. The Toro® GrandStand combines the speed and comfort of a zero-turn rider with the on-and-off ease of a wide area walk-behind — creating a fast, maneuverable and more productive alternative. Cushioned suspension keeps operators fresh while the traction and stability keep them working. It's the ideal combination to get more done in less time.

- ✓ IMPROVE PRODUCTIVITY through easy access on and off the machine.
- ✓ SAVE TRAILER SPACE and enhance versatility with compact size.
- ✓ REDUCE OPERATOR FATIGUE with platform suspension and twin-lever steering controls.
- ✓ **INCREASE OPERATOR VISIBILITY** which leads to less damage and higher-quality work.
- **✓ ADJUST HEIGHT-OF-CUT** from the operator platform.
- ✓ REDUCE VIBRATIONS and improve footing with the antifatigue rubber mat.



WATCH THE VIDEO

Toro.com/LCE-videos



INNOVATIVE SPEED CONTROL

Changes drive tyre response without limiting the travel of the controls, or slowing down the engine or blades.



FLEX-RIDE OPERATOR PLATFORM

Self-compensates for operators of all sizes, resulting in less fatigue and more productivity all day.




2-IN-1 VERSATILITY

Converts the GrandStand to a walk-behind. Just lower it back down to ride – no need to switch mowers.

ULTRA-COMPACT FOOTPRINT

Ideal for smaller residential properties or areas with gates and tight spaces, available in 91cm and 102cm models.

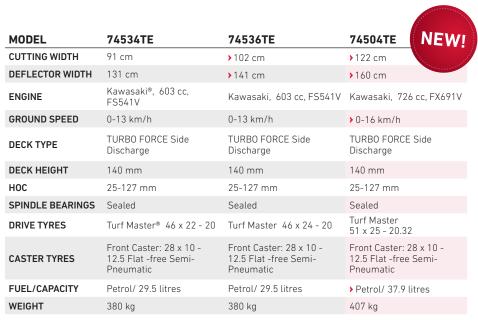

> = Enhanced or step-up feature


ACCESSORIES



TRASH BAG KIT 121-7530



STRIPING KIT117-8560
(74534TE & 74536TE only)
131-1470 (74568TE only)



LIGHT KIT 114-3505



BIG ON FEATURES, NOT YOUR BUDGET

Budget-minded pros and large acreage owners, meet your match. The Commercial 2000 Series is the perfect entry into our professional-grade line. These workhorses stretch your investment with Toro® durability — and there's nothing entry-level about the crisp, clean cut. Try the 2000 Series and you'll see what we mean (and you'll never want to go back).

- ✓ **GAIN DURABILITY** with a 7/10 gauge high-strength steel deck and a rugged 7.6 cm x 3.8 cm tubular steel carrier frame.
- ✓ ENJOY ADDED STABILITY with a low center of gravity for greater handling on hills.
- ✓ **MINIMIZE MAINTENANCE** with a heavy-duty canister air filtration system that protects the engine.
- ✓ INCREASED PERFORMANCE from commercial-grade ZT-3400 hydraulics.
- ✓ CHANGE DECK HEIGHT quickly and easily with the standard lift assist pedal.



Z-MASTER® COMMERCIAL 2000 SERIES



TURBO FORCE® DECKS

Resist impact damage, even in extreme conditions with 12.7 cm deep 7/10 gauge steel deck and strong 20 cm aluminium spindle housings.



CUSTOM-DESIGNED SEAT CUSHIONS

Reduce fatigue and increase operator comfort with thick, custom-designed cushions and large bolsters.



TWIN SOFT BAGGER 78569



COMMERCIAL ENGINES

Provide professional-grade power with the twin-cylinder FX engines by Kawasaki.



COMMERCIAL-GRADE ZT-3400 HYDRAULICS

Eliminate hoses and potential leak points with the integrated pump and wheel motor.



BIMINI FOLDING SHADE ASSEMBLY 115-4510



TORO DELUXE RIDER COVER

490-7319

E-Z VAC **BLOWER & DRIVE KIT**

78571

MODEL	74142TE - 122CM
CUTTING WIDTH	122 cm
DEFLECTOR WIDTH	160 cm
ENGINE	Kawasaki, 726cc, FX651V
GROUND SPEED	0-13 km/h
DECK TYPE	TURBO FORCE Side Discharge
DECK HEIGHT	127 mm
HOC	38-127 mm
SPINDLE BEARINGS	Sealed
DRIVE TYRES	Turf Master 56 x 24 - 30.5
CASTER TYRES	33 x 12.5 - 15 Pneumatic
FUEL/CAPACITY	Petrol/ 30.3 litres
WEIGHT	451 kg



MASTER THE TOUGHEST JOB CONDITIONS

The Toro® Z Master Professional 6000 Series is the next generation of petrol powered zero-turning radius mowers. Building on industry leading performance features like TURBO FORCE® cutting technology, the toughest spindle assemblies and more, Toro has added improved comfort, enhanced traction and control plus additional professional features. The Z Master Professional 6000 Series models have a low center of gravity, adding more stability for improved handling on slopes and superior manoeuvrability.

- **✓ HANDLE DEMANDING CONDITIONS** with the powerful 726–852 cc engines.
- ✓ **REDUCE OPERATOR FATIGUE** with a thick, cushioned, deluxe suspension seat and 3-D isolator mounts that absorb vibrations.
- ✓ EASE OVER BUMPS, raised areas and turns with the convenient foot-pedal deck lift.
- ✓ **OUTSTANDING STABILITY** is yours with a low center of gravity that enhances handling on hills.
- ✓ SMOOTH AND POWERFUL RESPONSE from unitized pump and wheel motors
- ✓ ABSORB IMPACT, eliminate deck sway and get a clean cut on hillsides with the robust deck hanging system.

NEW MYRIDETM SUSPENSION SYSTEM

Long days will feel short with the all-new amazingly comfortable MyRIDE™ suspension system (74909TE only). The fully suspended, adjustable operator platform isolates bumps and vibrations so you don't feel the rough terrain. It's the Toro toughness you expect with a ride you won't believe.



Z MASTER® PROFESSIONAL 6000 SERIES



TURBO FORCE® CUTTING DECKS Feature 6 mm thick heat-treated steel blades. Nothing cuts as fast or as well.



and massive base.

TOUGH SPINDLES Survive impacts that would destroy lesser spindles, thanks to a stout cast iron housing



COMFORTABLE RIDE

With a deluxe suspension seat that features thick cushions, large bolsters and 3-D isolator mounts that absorb bumps and vibrations to reduce operator fatigue.



DECK LIFT ASSIST

Adjusts the deck height quickly and easily with the standard deck lift assist foot pedal.



PERSONALIZED RIDE SETTINGS

Allows the operator to easily and quickly adjust their ride settings to account for their personal ride preferences, without tools. (74909TE only)



MAXIMUM COMFORT

The fully suspended operator platform allows for 91mm of travel and reduces impacts, bumps and vibrations that reach the operator, resulting in a superior ride. (74909TE only)

MODEL	74902TE	74919TE	74909TE NEW!	74925TE	74942TE
CUTTING WIDTH	122 cm	▶132 cm	132 cm	▶152 cm	152 cm
DEFLECTOR WIDTH	160 cm	▶172 cm	172 cm	▶192 cm	192 cm
ENGINE	Kawasaki, 726 cc, FX651V	Kawasaki, 726 cc, FX691V	Kawasaki, 726 cc, FX691V	Kawasaki, 852 cc, FX801V	Kawasaki, 852 cc, FX801V
GROUND SPEED	0-16 km/h	0-16 km/h	0-16 km/h	> 0-18.5 km/h	0-18.5 km/h
DECK TYPE	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge
DECK HEIGHT	140 mm	140 mm	140 mm	140 mm	140 mm
HOC	25-140 mm	25-140 mm	25-140 mm	25-140 mm	25-140 mm
SPINDLE BEARINGS	Greasable	Greasable	Greasable	Greasable	Greasable
DRIVE TYRES	Turf Master 61 x 24 - 30.5	Turf Master 61 x 24 - 30.5	Turf Master 61 x 24 - 30.5	Turf Master 61 x 30.5 - 30.5	Turf Master 61 x 30.5 - 30.5
CASTER TYRES	33 x 12.5 - 15 Flat-free Semi-Pneumatic	33 x 16.5 - 15 Flat-free Semi-Pneumatic	33 x 16.5 - 15 Flat-free Semi-Pneumatic	Multi Trac 33 x 16.5 - 15 Flat-free Semi-Pneumatic	Multi Trac 33 x 16.5 - 15 Flat-free Semi-Pneumatic
FUEL/CAPACITY	Petrol/ 45 litres	Petrol/ 45 litres	Petrol/ 45 litres	Petrol/ 45 litres	Petrol/ 45 litres
WEIGHT	508 kg	517 kg	553 kg	569 kg	588 kg

> = Enhanced or step-up feature


ACCESSORIES



BIMINI FOLDING SHADE ASSEMBLY 115-4510



OPERATOR CONTROLLED DISCHARGE CHUTE 117-3600



HITCH KIT 109-9487



DOMINATE THE MOST DEMANDING JOBS

It's 7 a.m. The grass is long and wet.

And you've got five more properties to mow after this one. At times like these, you don't want a struggle. You need power. Toro's Professional 7000 Series gives you the torque to take on extreme mowing conditions that would max out a conventional gasoline-powered mower. Better yet, it runs on diesel, so you get more power with less fuel than a comparable gasoline engine.

- **✓ POWER THROUGH** the toughest conditions with the high-torque 3-cylinder diesel engine.
- **▼ RESIST DAMAGE** from debris with the rugged deck made of 7 gauge, high-strength steel.
- ✓ **USE BIODIESEL** fuel blends with the compatible fuel pump, fuel filter and fuel lines.
- **✓ SURVIVE IMPACTS** that could destroy lesser spindles with Toro's robust spindle assemblies.
- **✓ SAVE DOWNTIME** with flat-free, semi-pneumatic caster tires.
- ✓ REDUCE OPERATOR FATIGUE with a thick, cushioned, deluxe suspension seat that absorbs vibrations.

Z MASTER® PROFESSIONAL 7000 SERIES



TURBO FORCE® DECK

Works with the high-torque diesel engine for outstanding results at higher ground speeds.



DIESEL ENGINES

Lower fuel consumption and are more efficient than comparable petrol engines. Diesel fuel also contains about 18% more energy by volume for extra power.



BIODIESEL READY ENGINES

Accept up to 20% biodiesel (B20) fuel blends, which can cut emissions nearly in half vs. traditional diesel fuel (based on EPA-designed engine tests)




LIQUID-COOLED ENGINE SYSTEM

Extends engine life with cleaner combustion. Plus, a well-balanced engine keeps vibration to a minimum.

MODEL	74279TE REAR	74264TE SIDE	74265TE SIDE
CUTTING WIDTH	132 cm	132 cm	>152 cm
DEFLECTOR WIDTH	173 cm	173 cm	▶193 cm
ENGINE	23 hp (16.6kW) Kubota®, Diesel	23 hp (16.6kW) Kubota, Diesel	23 hp (16.6kW) Kubota, Diesel
GROUND SPEED	0-18 km/h	0-18 km/h	0-18 km/h
DECK TYPE	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge
DECK HEIGHT	140 mm	140 mm	140 mm
HOC	38-127 mm	38-127 mm	38-127 mm
SPINDLE BEARINGS	Sealed	Sealed	Sealed
DRIVE TYRES	58 x 24-30.5 4-ply	58 x 24-30.5 4-ply	58 x 30-30.5 4-ply
CASTER TYRES	33 x 16.5 - 15 Flat-free Semi-Pneumatic	33 x 16.5 - 15 Flat-free Semi-Pneumatic	33 x 16.5 - 15 Flat-free Semi-Pneumatic
FUEL/CAPACITY	Diesel/ 45 litres	Diesel/ 45 litres	Diesel/ 45 litres
WEIGHT	733 kg	733 kg	722 kg

> = Enhanced or step-up feature

ACCESSORIES



BIMINI FOLDING SHADE ASSEMBLY

115-4510




RUBBER STRIPING KIT 107-1630



OPERATOR CONTROLLED DISCHARGE CHUTE KIT 117-3600



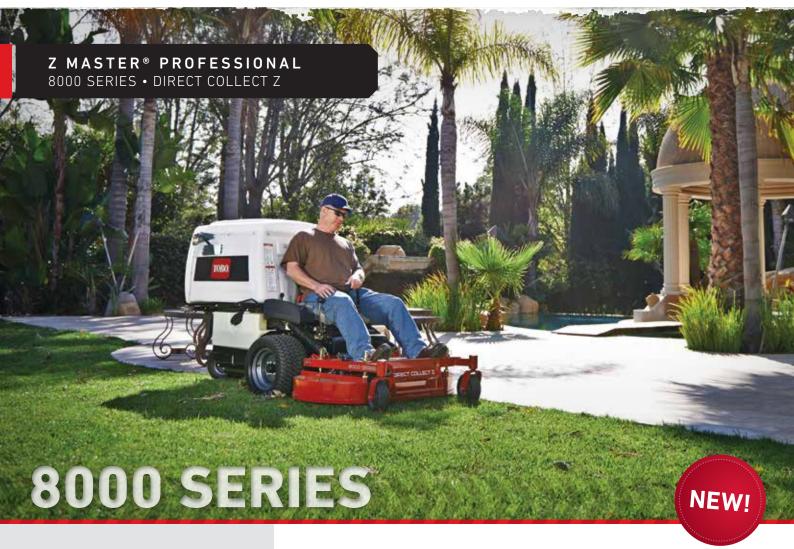

THE PERFECT ANSWER FOR A PERFECT CUT

For high-end properties, a clean, manicured look is everything. The 8000 Series Direct Collect Z gives you that and much more. A powerful blower moves more air, allowing large volumes of material to be thrown into the hopper. The rear-discharge deck lets you trim on either side while keeping flower beds and walkways clipping-free. And the high-capacity collection system helps extend mowing time. With ground speeds up to 11 kph, the 8000 Series is the answer for a perfect cut in less time.

- ✓ TRIM ON BOTH SIDES with the rear direct collect deck to keep flower beds and walkways clipping-free.
- ✓ **SLICE GRASS INTO FINE PARTICLES** with a higher blade tip speed and optimal recycling kits for a consistent, high-quality cut.
- ✓ REDUCE DOWNTIME with features that reduce maintenance including a heavy-duty sealed gearbox and a simple, reliable belt drive system.
- ✓ MOW LONGER with the 28 liter fuel tank and the high-capacity collection system for bagging and mulching for fewer stops.
- ✓ **GAIN PRODUCTIVITY** with a ground speed of up to 11 kph and a hydro drive system for efficient, precise control.



Z MASTER® PROFESSIONAL 8000 SERIES • DIRECT COLLECT Z



FILL-REDUCTION SYSTEM

Switches from 100% bagging to 50% recycling and 50% bagging, so the hopper can be emptied less frequently.



EFFORTLESS CONTROLS

Enable you to manoeuver in tight spots almost effortlessly.



OUT FRONT DECK DESIGN

Allows for more manoeuverability and mowing in tighter areas where traditional zero turns can't.



HIGH CAPACITY HOPPER

Means less time emptying and more time mowing. Exclusive baffle design fills the 33 cm³ hopper evenly back to front for maximum efficiency.



TOUGH, DEEP DECKS

Made of welded 7/10-gauge steel, the deep 11.7 cm design handles taller grass and provides greater vacuum for a clean, refined cut.



REAR DISCHARGE DECK

Allows for trimming on either side, keeping flower beds and walkways clipping-free.

MODEL	74311TE NEW!
CUTTING WIDTH	122 cm
DEFLECTOR WIDTH	N/A
ENGINE	20.5 HP Kohler Command Pro 640cc*
GROUND SPEED	0-11 km/hr
DECK TYPE	Commercial rear discharge deck
DECK HEIGHT	188 mm
HOC	25-100 mm
DRIVE TYRES	45.7 x 26.7 – 25.4
CASTER TYRES	20 X 7.6 - 10 Semi Pneumatic
FUEL/CAPACITY	Petrol/ 28 litres
WEIGHT	544 kg



SIMPLE SELECTION

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.

MODEL	HD PROLINE 22291	HD PROLINE 22293	TURFMASTER 22205TE
CUTTING WIDTH	53 cm	53 cm	>76 cm
ENGINE	Kawasaki®, 4-cycle, 179 cc, FJ180V	Kawasaki, 4-cycle, 179 cc, FJ180V	Kawasaki, 4-cycle, 179 cc, FJ180V
STARTER	Recoil	Recoil	Recoil
DRIVE SYSTEM	Fixed speed, RWD	>3-speed, RWD	Fixed Speed, RWD
DECK TYPE	> Recycler/Rear Bag Aluminum	Recycler/Rear Bag Aluminum	> Recycler/Rear Bag/Side Discharge Steel
нос	>25mm – 114mm, 4 point	25mm – 114mm, 4 point	> 38 mm - 127 mm, 2 point
SPEED	> 0-6.0 km/h forward	0-6.0 km/h forward	0-6.0 km/h forward
FUEL/CAPACITY	➤ Petrol / 3.8 litres	> Petrol / 3.8 litres	Petrol / 3.8 litres
WEIGHT	50 kg	56 kg	72 kg
TYRES	23 cm x 6 cm Rubber tires with poly wheels	23 cm x 6 cm Rubber tires with poly wheels	-
DRIVE TYRES	-	-	Rear: 20 cm x 5 cm
CASTER TYRES	-	-	Front: 25 cm x 5 cm Rubber tires with cast wheels
CONTROL SYSTEM	-	-	-
MOWING DECKS			
DECK CONSTRUCTION	Corrosion resistant 6 mm aluminum	Corrosion resistant 6 mm aluminum	>13 gauge heavy duty steel
BULL-NOSE BUMPER	-	-	-
ADJUSTABLE DISCHARGE BAFFLE	-	-	-
RUBBER DISCHARGE CHUTE	-	-	-
SPINDLE HOUSING	-	-	-
SPINDLE BEARING	-	-	-
BLADES	3.4 mm thick steel with blade stiffener	3.4 mm thick steel with blade stiffener	3.4 mm thick steel with blade stiffener
BLADE ENGAGEMENT	Zone Start (ZS)	> Blade Brake Clutch (BBC)	Blade Brake Clutch (BBC)
LUBRICATION	Forced splash lubrication	Full-pressure lubrication (with oil filter)	Full-pressure lubrication (with oil filter)
AIR FILTER	Dual Element	Dual Element	Dual Element
BAG CAPACITY	77 litres	77 litres	> 88 litres
COMMERCIAL WARRANTY	1 Year, Full Coverage, 2 Year, GTS**	1 Year, Full Coverage, 2 Year, GTS**	1 Year, Full Coverage, 2 Year, GTS**
PRICE			

ADDITIONAL PARTS & ACCESSORIES

HD WALK	HD WALK POWER MOWERS					
MODEL	PART#	DESCRIPTION				
22291	125-8840	Cup-Anti Scalp				
	130-9700	Engine Guard				
	130-9374	Rear-Discharge Kit				
	130-9701	Side Guards				
22293	130-9374	Rear-Discharge Kit				
22186TE	125-5064	Mulch Kit				
22203TE	22201	Mulch Kit				
	22202	Side-Discharge Kit				

MIDSIZE		
MODEL	PART #	DESCRIPTION
30070/	110-2026	Bagger Enhancement Kit
30071	110-2080	Recycler Kit
	120-7447	Air Element Filter
	108-1118	Blade - Atomic (6-pack)
	105-7796-03	Blade - Atomic
	108-1117	Blade - High Flow (6-pack)
	110-0406	Blade - Low Flow (6-pack)
	105-7795-03	Blade - Low Flow

MIDSIZE		
MODEL	PART#	DESCRIPTION
30070/	110-0409	Blade - Med Flow (6-pack)
30071	105-7794-03	Blade - Med Flow
	110-0408	Blade - Recycler (6-pack)
	105-7779-03	Blade - Recycler
	120-2235	Fuel Filter
	119-5852	Oil Filter
	115-4190	Operator-Controlled Discharge Chute Kit (30070 only)

PROSTRIPE®	MID-SIZE HYDRO UNIT	MID-SIZE T-BAR GEAR	MID-SIZE T2 HYDRO	
02656	30069	30070	30071	
56 cm	> 82, 91 or 122 cm	91 cm	91 cm	
Briggs & Stratton, Series 850 OHV, 190cc	Kawasaki®, 4-cycle, 603 cc, FS541V,0HV V-Twin	Kawasaki, 4-cycle, 603 cc, FS481V, Air- cooled	Kawasaki, 4-cycle, 603 cc, FS481V, Air- cooled	
Recoil, ZS	> Electric	Recoil	Recoil	
Fixed Speed, RWD	Twin Hydro-gear® pumps with Parker® wheel motors	Peerless® 5-speed, with reverse	Twin Hydro-gear® pumps with Parker wheel motors	
Rear Discharge, Rear-Roller, Aluminium	Rear Discharge or Flail	>TURBO FORCE® Side Discharge, Recycler	TURBO FORCE® Side Discharge, Recycler	
1-point, 13-60	Rear Discharge: 25-108 mm; Flail: 12-140 mm	25 - 114mm	25 - 114mm	
0-4.4km/h forward	Forward: 0 - 10 km/h; Reverse: 3.5 km/h	Forward: 0 - 7.5 km/h; Reverse: 3.7 km/h	Forward: 0 – 8.0 km/h; Reverse: 3.2 km/h	
Petrol/ 1.1 litres	> Petrol / 19 litres	Petrol / 18 litres	Petrol / 18 litres	
51 kg	261 kg, 263 kg or 279 kg	267 kg	303 kg	
Rear-Roller	Drive: 16 x 6.50 – 8, 4-ply ProTech; Castor: 9 x 3.50 – 4, 4-ply smooth with greaseable bearings	-	-	
-	-	Drive: 16 x 6.50 – 8, 4-ply ProTech	Drive: 16 x 6.50 – 8, 4-ply ProTech	
-	-	Castor: 9 x 3.50 – 4, 4-ply smooth with greaseable bearings	Castor: 9 x 3.50 – 4, 4-ply smooth with greaseable bearings	
-	Pistol Grips	T-Bar	Twin Lever	
Aluminium	> 2, 3 or 4 blade, 7-gauge welded construction	2 blade, 7-gauge welded construction	2 blade, 7-gauge welded construction	
-	-	> Standard	Standard	
-	-	> Standard, tools-free	Standard, tools-free	
-	-	> Standard	Standard	
-	24 cm diameter cast iron	24 cm diameter cast iron	24 cm diameter cast iron	
	Sealed ball bearings	Sealed ball bearings	Sealed ball bearings	
3.4 mm thick steel with blade stiffener	Deck 02710: (2) 5.2 mm Decks 02711& 020712 (3) 6.3mm	(2) 6 mm heat-treated steel	(2) 6 mm heat-treated steel	
Zone Start (ZS)	-	-	-	
-	Full-pressure lubrication (with oil filter)	Full-pressure lubrication (with oil filter)	Full-pressure lubrication (with oil filter)	
-	Dual Element	Dual Element	Dual Element	
71 litres	-	-	-	
2 Year	2 Year	2 Year	2 Year	

> = Enhanced or step-up feature

MIDSIZE			MIDSIZE			MIDSIZE		
MODEL	PART #	DESCRIPTION	MODEL	PART #	DESCRIPTION	MODEL	PART #	DESCRIPTION
30070/	30104	Soft Bag	30069	02720	Mid-Size Flail Attachment	30069	92-2153	Spark Plug
30071	92-2153	Spark Plug		02711	Mid-Size Rear-Discharge Deck		30109	Sulky
	117-0066	Synthetic Oil		120-7447	Air Element Filter		117-0066	Synthetic Oil
	38903	Toro 4-cycle SAE 30 Oil		02930	Cleated Tire Kit		38903	Toro 4-cycle SAE 30 Oil
	30110	Tru Trak Sulky		02931	Dual Wheel Kit		110-2085	Weight Kit
	112-7059-01	Weight - Cast		120-2235	Fuel Filter		•	•
30069	02712	Mid-Size Rear-Discharge Deck		02932	Narrow Wheel Kit			
	02710	Mid-Size Rear-Discharge Deck		119-5852	Oil Filter			

SIMPLE SELECTION

COMPARE KEY FEATURES TO HELP FIND THE MOWERS THAT FIT YOUR APPLICATION.

DEFLECTOR WIDTH ENGINE GROUND SPEED DECK TYPE DECK HEIGHT HOC SPINDLE BEARINGS DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT 1 KENGINE KENGINE	91 cm 131 cm Kawasaki®, 603 cc, FS541V 0-13 km/h TURBO FORCE Side Discharge	>102 cm >141 cm Kawasaki, 603 cc, FS541V 0-13 km/h	>122 cm >160 cm Kawasaki, 726 cc, FX691V	122cm 160 cm	122 cm	>132 cm
ENGINE GROUND SPEED DECK TYPE DECK HEIGHT HOC SPINDLE BEARINGS DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Kawasaki®, 603 cc, FS541V 0-13 km/h TURBO FORCE Side	Kawasaki, 603 cc, FS541V	Kawasaki, 726 cc,		160 cm	
GROUND SPEED DECK TYPE DECK HEIGHT HOC SPINDLE BEARINGS DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	FS541V 0-13 km/h TURBO FORCE Side	FS541V			1000	▶172 cm
DECK TYPE DECK HEIGHT HOC SPINDLE BEARINGS DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	TURBO FORCE Side	0-13 km/h		Kawasaki, 726cc, FX651V	Kawasaki, 726 cc, FX651V	Kawasaki, 726 cc, FX691V
DECK TYPE DECK HEIGHT 1 HOC SPINDLE BEARINGS S DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)			> 0-16 km/h	0-13 km/h	0-16 km/h	0-16 km/h
HOC 2 SPINDLE BEARINGS S DRIVE TYRES T CASTER TYRES S FUEL/CAPACITY F WEIGHT 3 HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)		TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge
SPINDLE BEARINGS DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	140 mm	140 mm	140 mm	140 mm	140 mm	140 mm
DRIVE TYRES CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	25-127 mm	25-127 mm	25-127 mm	38-127 mm	>25-140 mm	25-140 mm
CASTER TYRES FUEL/CAPACITY WEIGHT HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Sealed	Sealed	Sealed	Sealed	Greasable	Greasable
CASTER TYRES 1 S FUEL/CAPACITY WEIGHT 3 HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Turf Master® 46 x 22 - 20	Turf Master 46 x 24 - 20	Turf Master 51 x 25 - 20.32	Turf Master 56 x 24 - 30.5	Turf Master 61 x 24 - 30.5	Turf Master 61 x 24 - 30.5
WEIGHT 3 HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Front Caster: 28 x 10 - 12.5 Flat -free Semi-Pneumatic	Front Caster: 28 x 10 - 12.5 Flat -free Semi-Pneumatic	Front Caster: 28 x 10 - 12.5 Flat -free Semi-Pneumatic	33 x 12.5 - 15 Pneumatic	33 x 12.5 - 15 Flat- free Semi-Pneumatic	33 x 16.5 - 15 Flat- free Semi-Pneuma
HYDRAULIC DRIVE SYSTEM PUMP DISPLACEMENT (CC/REV)	Petrol/ 29.5 litre	Petrol/ 29.5 litres	> Petrol/ 37.9 litres	Petrol/ 30.3 litres	> Petrol/ 45 litres	Petrol/ 45 litres
PUMP DISPLACEMENT (CC/REV)	380 kg	380 kg	407 kg	451 kg	508 kg	517 kg
MOWING DECKS	10 cc	10 cc	10 cc	12 cc / rev pump	12 cc / rev pump	12 cc / rev pump
ADJUSTABLE DISCHARGE SAFFLE	Standard, Tools Free	Standard, Tools Free	Standard, Tools Free	N/A	Standard, Tools Free	Standard, Tools Fre
F S V	Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start.	Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start.	Foldable Operator Platform with Suspension System, Walk-Behind Capable, Rubber Mat on Platform, Twin Lever Steering with Variable Speed Control, and Electric Start.	Custom seat, Arm rests, Heavy Duty Canister Air Cleaner, Two-Position Folding ROPS, Beverage Holder, Storage Compartments, Z stand Standard	Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two- Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. Z Stand Standard, 3-D Isolation Seat, Arm Rests, Optional Suspension System.	3-D Isolation Seat, Arm Rests, Heavy- Duty Canister Air Cleaner, Digital Information Center Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two- Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lif Design.
PRICE						

ADDITIONAL PARTS & ACCESSORIES

Z-MASTER	R 2000 SERIES				
MODEL	PART#	DESCRIPTION			
74142TE	117-7277-03	Hi Flo Blade			
	117-7278-03	Mulch Blade			
	115-4510	Bimini Folding Shade			
	78571	Blower/Drive Kit			
	117-3600	Chute Gate Kit w/Bag			
	121-4812	Deluxe Seat Assembly			
	116-1154	Light Kit			
	99-4664	Minder Filter			
	120-2401	Recycler Mulch Kit			
	75-6880	Spark Screen-Arrestor			

Z-MASTER 2000 SERIES

78551

74925TE

MODEL	PART #	DESCRIPTION
74142TE	490-7319	Toro Deluxe Rider Cover
	TC26	Trash Bag Kit
	78569	Twin Soft Bagger
	121-7576	Weight Kit
	121-4811	Z Stand Kit
Z-MASTER	R 6000 SERIE	S
MODEL	PART #	DESCRIPTION
74902TE/	115-4510	Bimini Folding Shade
74919TE/	78568	DFS Bagger

E-Z Vac Blower/Drive Kit

Z-MASTER 6000 SERIES

MODEL	PART#	DESCRIPTION
74902TE/	109-9487	Hitch Kit
74919TE/	116-1154	Light Kit
74925TE	117-3600	Operator-Controlled Discharge Chute Kit
	115-7466	Recycler Mulch Kit
	78580	Spindle Kit
	115-7470	Striping Kit
	78562	Twin Soft Bagger
	78584	Z Stand Kit
74942TE	115-4510	Bimini Folding Shade
	116-9730	Bumper Kit

	Z-MASTER 6000 SERIES MYRIDETM 74909TE	Z-MASTER 6000 SERIES 74925TE	Z-MASTER 6000 SERIES 74942TE	Z-MASTER 7000 SERIES 74279TE	Z-MASTER 7000 SERIES 74264TE	Z-MASTER 7000 SERIES 74265TE	Z-MASTER 8000 SERIES 74311TE
	132 cm	>152 cm	152 cm	132 cm	132 cm	152 cm	122 cm
	172 cm	>192 cm	192 cm	173 cm	173 cm	193 cm	N/A
	Kawasaki, 726 cc, FX691V	Kawasaki, 852 cc, FX801V	Kawasaki, 852 cc, FX801V	23 hp (16.6kW) Kubota®, Diesel	23 hp (16.6kW) Kubota, Diesel	23 hp (16.6kW) Kubota, Diesel	20.5 HP Kohler Command Pro 640cc*
	0-16 km/h	> 0-18.5 km/h	0-18.5 km/h	0-18 km/h	0-18 km/h	0-18 km/h	0-11 km/hr
:	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Rear Discharge	TURBO FORCE Side Discharge	TURBO FORCE Side Discharge	Commercial rear discharge deck
	140 mm	140 mm	140 mm	140 mm	140 mm	140 mm	▶188 mm
	25-140 mm	25-140 mm	25-140 mm	>38-127 mm	38-127 mm	38-127 mm	25-100 mm
	Greasable	Greasable	Greasable	Sealed	Sealed	Sealed	N/A
	Turf Master® 61 x 24 - 30.5	Turf Master 61 x 30.5 - 30.5	Turf Master 61 x 30.5 - 30.5	58 x 24-30.5 4-ply	58 x 24-30.5 4-ply	58 x 30-30.5 4-ply	45.7 x 26.7 – 25.4
tic	33 x 16.5 - 15 Flat- free Semi-Pneumatic	Multi Trac 33 x 16.5 - 15 Flat-free Semi- Pneumatic	Multi Trac 33 x 16.5 - 15 Flat-free Semi- Pneumatic	33 x 16.5 - 15 Flat- free Semi-Pneumatic	33 x 16.5 - 15 Flat- free Semi-Pneumatic	33 x 16.5 - 15 Flat- free Semi-Pneumatic	20 X 7.6 - 10 Semi Pneumatic
	Petrol/ 45 litres	Petrol/ 45 litres	Petrol/ 45 litres	Diesel/ 45 litres	Diesel/ 45 litres	Diesel/ 45 litres	Petrol/ 28 litres
	553 kg	569 kg	588 kg	733 kg	733 kg	722 kg	544 kg
	12 cc / rev pump	16 cc / rev pump	16 cc / rev pump	16 cc / rev pump	16 cc / rev pump	16 cc / rev pump	Hydraulic 12cc/rev
		<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u>I</u>
е	Standard, Tools Free	Standard, Tools Free	N/A	Standard, Tools Free	Standard, Tools Free	Standard, Tools Free	> Fill reduction baffles standard
& 1	MyRide Suspension system. 3-D Isolation Seat, Arm Rests, Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two- Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design.	3-D Isolation Seat, Arm Rests, Heavy- Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two- Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design.	Heavy-Duty Canister Air Cleaner, Digital Information Center & Fuel Gauge, 4.5 mm Steel Construction, 25 mm Heavy-Duty Spindle Shaft, Two- Position Folding ROPS, Beverage Holder, Storage Compartments, Foot Pedal Deck Lift Design. 3-D Isolation Seat, Arm Rests, Optional Suspension System.	Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter	Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter; Optional: DFS Collection & Recycler Kit	Drive System: Tandem Hydraulic Pumps; 2 Wheel Motors; Heavy Duty Electromagnetic Clutch; Toro Z Stand; Deluxe Suspension Seat With Armrest; Hour Meter; Optional: DFS Collection & Recycler Kit	Heavy-Duty Canister Air Cleaner, High capacity 33 cm3 hopper, out front deck design, ability to bag, mulch or both.

> = Enhanced or step-up feature

Z-MASTER 6000 SERIES

MODEL	PART #	DESCRIPTION			
74942TE	109-9487	Hitch Kit			
	116-1154	Light Kit			
	117-3600	Operator-Controlled Discharge Chute Kit			
	115-7466	Recycler Mulch Kit			
	78580	Spindle Kit			
	115-7470	Striping Kit			
	78584	Z Stand Kit			

Z-MASTER 7000 SERIES

Z-MAJI LI	IN 7000 SERIES				
MODEL	PART #	DESCRIPTION			
74264TE/	115-4510	Bimini Folding Shade			
74265TE	107-1634	Front Skirt Kit			
	99-8925	Hitch Kit			
	107-9880	Light Kit			
	99-4664	Minder Filter			
	78521	Operator-Controlled Discharge Chute Kit			
	107-1610	Recycler Mulch Kit			
	108-2162	Roller Striping Kit			
	107-1630	Rubber Striping Kit			
	105-1672	Spark Arrestor Kit			

Z-MASTER 7000 SERIES

MODEL	PART#	DESCRIPTION
74279TE	115-4510	Bimini Folding Shade
	99-8925	Hitch Kit
	107-9880	Light Kit
	99-4664	Minder Filter
	105-1672	Spark Arrestor Kit





EXPERIENCE THE TORO DIFFERENCE... ONLY AT YOUR LOCAL TORO DEALER

When you buy a Toro, you get the total Toro treatment. Your Toro dealer knows how to treat you right. They roll out the red carpet every day to provide you with exceptional customer service, competitive pricing, special financing options and more. Visit your independent dealer for products that cover your needs year-round, or go to toro.com



GENUINE TORO® PARTS

To best protect your investment and maintain optimal performance of your turf equipment, count on Toro genuine parts. When it comes to reliability, Toro delivers replacement parts designed to the exact engineering specifications of our equipment. For peace of mind, insist on Toro genuine parts.



RESPONSIVE TORO DEALERS

Toro dealers have the skills, training and commitment to keep your equipment performing its best. Leveraging their extensive inventory and Toro's industry-leading 98% fill rate on parts, your Toro dealer leads the market in parts availability.

CUSTOMER CARE

Toro has an extensive network of factory trained professional dealers in place to ensure you have the parts and service support needed to keep your Toro product running at peak performance. Visit Toro.com to find the dealer nearest you.

CLICK WWW.TORO.COM

Find immediate answers to frequently asked questions and other helpful information, including a dealer locater, parts lookup, product registration, downloadable owner's manuals, safety information, special financing offers and interactive product manuals.

VISIT YOUR LOCAL TORO DEALER

Count on our national network of factory-authorized dealers for genuine Toro parts and service support. Toro landscape contractor equipment dealers regularly undergo extensive technical training to stay knowledgeable about the servicing and operation of new products.

HIGH-PERFORMANCE HYDRO OIL

Toro offers high-performance hydraulic oil specially formulated to maximize our commercial mowers' performance. Compared to other hydraulic oils, Toro HYPR-OIL 500™ offers greater thermal stability, higher shear resistance, and excellent wear protection — all at a similar price. The unique formulation also doubles the service interval to 500 hours on 2009 and later model year equipment, including Z Master® G3 and GrandStand® mowers.

MVP BLADE AND BELT PACKS

Stock up and save with specially priced Toro MVP (Maintenance, Value and Performance) Blade and Belt Packs for most gasoline-powered Toro Z Master® models. Each pack contains a supply of commonly replaced maintenance parts, including three standard blades, one hydraulic oil filter, one deck drive belt and one traction or pump drive belt.

WHY CHOOSE TORO BLADES AND BELTS?

Made specifically for Toro mowers, Toro belts are manufactured to tight tolerances to provide optimum fit, minimize slippage and ensure dependable performance. Toro blades are crafted from heat-treated alloy steel to resist flexing and abrasive wear, as well as to provide a crisp, clean cut.

TORO® TOTAL COVERAGE GUARANTEE

Toro stands behind its equipment with comprehensive warranty coverage (see your Toro dealer for complete details).

- Five-year or 1,200-hour¹ limited warranty on GrandStand® and most Z Master® mowers (four-year or 400-hour¹ limited warranty on other Z Master models), with a two-year commercial engine warranty² and a limited lifetime frame warranty³
- Two-year limited warranty² on mid-size walk-behind mowers
- One-year limited commercial warranty on 53 cm professional walk-behind mowers (2-year limited engine warranty on 53 cm Heavy-Duty models)
- One-year limited warranty on batteries and attachments
- 1 Whichever occurs first.
- $2\ \mathsf{Some}\ \mathsf{engines}\ \mathsf{used}\ \mathsf{on}\ \mathsf{Toro}\ \mathsf{LCE}\ \mathsf{Products}\ \mathsf{are}\ \mathsf{warranted}\ \mathsf{by}\ \mathsf{the}\ \mathsf{engine}\ \mathsf{manufacturer}.$
- 3 Original owner only. Lifetime Frame Warranty If the main frame, consisting of the parts welded together to form the tractor structure that other components such as the engine are secured to, cracks or breaks in normal use, it will be repaired or replaced under warranty at no cost for parts and labor. Frame failure due to misuse or abuse and failure or repair required due to rust or corrosion are not covered.







SAFETY AND TESTING

PROTECTING BOTH YOU AND YOUR BUSINESS



SAFE PRODUCTS DESIGNED TO PROVIDE PEACE OF MIND

Toro has a longstanding reputation for designing safe products. Just one example: All Toro Z Master® zero-turn riders are equipped with a folding roll-over protection system as a standard feature. All Toro LCE products are CE compliant.



SAFETY EDUCATION FOR YOU AND YOUR EMPLOYEES

At Toro, we produce our mowers with safety in mind and test against rigorous safety standards, but it doesn't stop there. We offer many tools to help train and protect you and your crew – and help safeguard your business. From on-line interactive, multilingual manuals and safety quizzes to product safety and training. Please visit the product safety information page on toro.com for more information.



PERFORMANCE EVALUATIONS FOR THE PROS, BY THE PROS

Each new Toro product is subjected to extensive high-tech testing at Toro's corporate headquarters, as well as coast-to-coast field evaluations in various types of turf and environmental conditions. Even after all of this testing, we still place product samples in the field with landscape professionals to ensure the equipment performs as intended.

SAVING TIME & WATER HAS NEVER BEEN EASIER.



WATERING **WINDOW** Short, nighttime watering to prevent disruption of your daytime outdoor activities.





Precision™ Soil Sensor

Lawn Master II® **Series**



HIGH ACTIVITY AREAS Good turf is required for optimum outdoor enjoyment with no wet or dry spots.



RAIN SHUTDOWN ♀ irrigation in the event of rain.



P-220 Series Wired RainSensors™

Wireless RainSensors™





LOW POWER CONSUMPTION O Allows more valves to run simultaneously, and lowers power costs.



EVOLUTION® Series



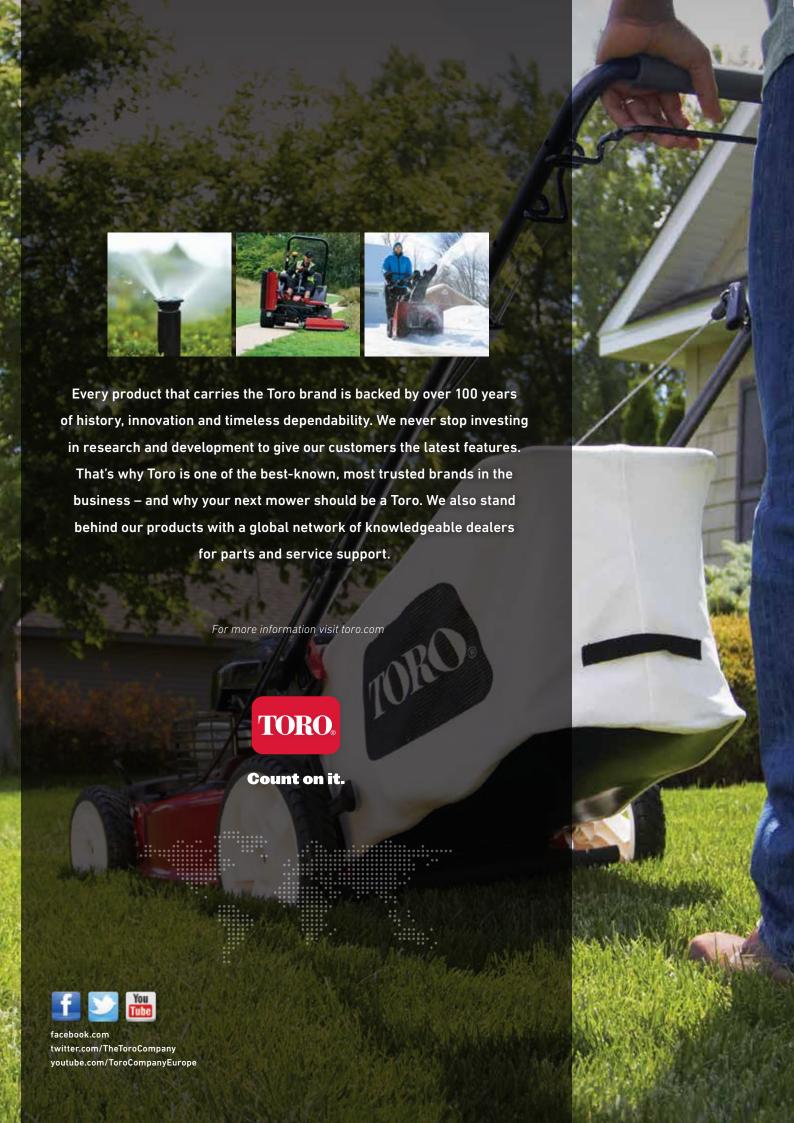

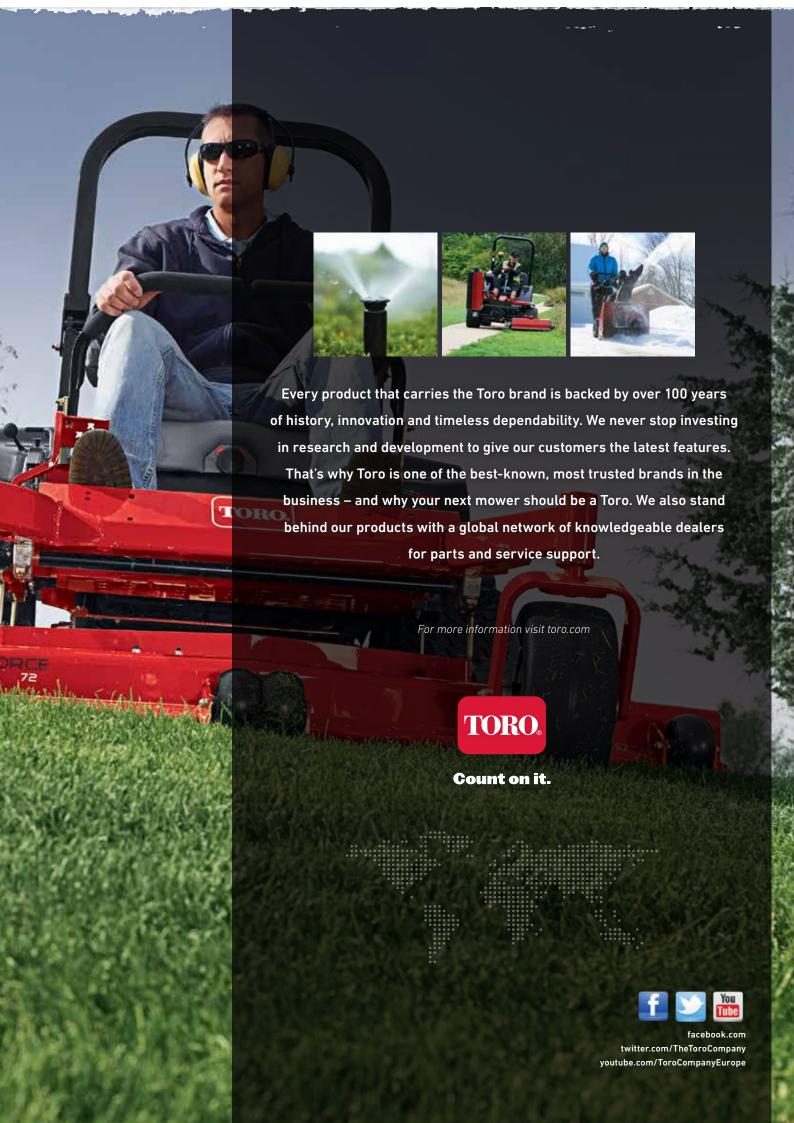







Toro is always there to help you care for your landscapes the way you want, when you want, better than anyone else.



Count on it.



f





facebook.com twitter.com/TheToroCompany youtube.com/ToroCompanyEurope

Worldwide Headquarters The Toro Company 8111 Lyndale Ave. So. Bloomington, MN 55420 U.S.A.

Phone: (1) 952 888 8801 Fax: (1) 952 887 8258

Printed in U.S.A. ©2016 The Toro Company. All Rights Reserved.

GB 200-XXXX

toro.com

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your dealer for details on all our warranties.

[Distributor / Dealer imprint area]