

ULTIMATE TURF ROLLING PERFORMANCE



Engineered for Elite Turf Performance

The HP11-III Roller delivers unmatched turf performance with a 73" swath and speeds up to 11 MPH—ideal for sports fields, athletic grounds, and large turf areas. Three independently driven, oscillating, and articulating rolls ensure 100% ground contact for consistent smoothing without turf damage, even on uneven or damp playing surfaces.

Powered by a 13HP Honda engine with low P.S.I. ground pressure, it includes a standard transport trailer. Optional kits and accessories enhance versatility and operator comfort.

Key Features and Benefits:

Unmatched Speed and Handling – Up to 11 MPH with double steering ratio for smooth, responsive handling.


Ultimate Convenience and Efficiency – Articulating steering and dual drive oscillating rolls deliver optimal traction and control.

Precision Rolling for a Perfect Finish – 73" swath, adjustable P.S.I., and beveled edge rolls ensure uniform results with minimal turf impact.



13 HP Honda Engine

A fuel-efficient, high-output 4-stroke, air-cooled engine with precision camshaft design and high compression ratio for optimal power. With a digital CDI ignition to ensure reliable performance.

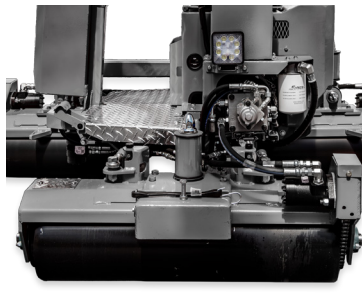

Drive Rolls

For maximum durability, a rugged tubular steel frame with continuous welds and reinforced gussets ensures long-lasting strength and reliable performance.



Optional Upgrades

Upgrades that enhance performance. LED light kit. Spike-Air Kit. Top Dressing Brush Kit, Tournament Roll Kit. Powered Roll Brush. Arm Rest Seat Upgrade. Pedal Extensions.



Transport Trailer

The HP11-III Trailer features an extra-long tailgate, rubber traction mat, and loading guides for safe transport, along with deflector step. Shown in orange, black is standard.

HP11-III GREENS ROLLER



Product Specifications	
Length	60" in (152cm)
Width	77" in (196cm)
Height	65" in (165cm)
Standard Equipment	
Engine	13 HP Honda, Electric Start
Fuel Tank	6 Gallon CARB Approved Fuel Tank
Controls	On/Off Switch, Choke and Fuel
Battery	12 Volt, 300 CCA automotive type
Hour Meter	Standard
Rolling Swath	73"
Steering Wheel	13-1/4" diameter, automotive type, tilt steering wheel. 13-1 ratio
Drive Rolls	Three (3) - Oscillating steel rolls, driven for positive traction. One (1) - 10-3/4" diameter x 36" long, Two(2) - 10 3/4" x 24" long with beveled ends. All rolls are machined to within two thousandths of an inch concentricity.
Speed	Variable, 0-11.9 MPH
Brakes	Hydrostatic
Hydraulic Components	One (1) heavy duty variable speed piston pump delivers oil to three (3) hydraulic motors that drive the rolls. Hoses: SAE JIC hose ends and fittings. 300PSI working, 12,000PSI burst. Motors Three (3) one on each roll. Pump: One (1) Hydro-Gear 0.97 cubic inch displacement
Traction Drive	Hydraulic pump to 3 hydrostats - 1 to each roll. Chain drive from hydraulic motors to rolls. #50 chain & sprockets.
Climbing Traction	Up to 40°
Seat	Molded cushion with protective edge trim, neutral safety switch & forward/reverse adjustment. Rubber mounted to reduce vibration.
Main Frame	2-1/2" x 2-1/2" x 1/4" steel square tube. Fully gusseted with continuous welds.
Trailer Information	
Length	68" in (173cm)
Width	79" in (201cm)
Hitch Height	16" in (41cm)
Weight	510lbs (231kg)
Options	
Roller Options	Powered Roll Brush, LED Light Kit, Top Dressing Brush Kit: Soft or Hard, Spike-Air Kit, Arm Rest Seat, Pedal Extensions, Tilt Trailer.



ID:188168446292