



GREENSPRO® e1700/1260
GREENS ROLLERS

GreensPro® e1700

The GreensPro e1700 is an all-electric greens roller that delivers cutting-edge design, dependable performance, and effortless operation. Its integrated trailer with SmartHitch™, intuitive joystick control, and built-in pass alignment feature help your crew achieve uniform, repeatable results with greater operator efficiency and productivity. With its expandable HyperCell® lithium battery pack, your crew can tackle even the most demanding layouts with confidence—finishing the job on a single charge

ALL ELECTRIC

Toro HyperCell battery technology and 100% electric control reduces noise levels, minimizes maintenance, and eliminates concerns with oil leaks on the green.



EXPANDABLE RANGE

The base configuration comes with two Toro HyperCell Batteries. For customers needing extra range, the unit can be upgraded to accommodate up to four batteries.



SMARTHITCH™ INTEGRATED TRAILER

The GreensPro e1700's built-in transport wheels replace separate trailers or pull-over drawbars. Simply drive up, connect, and lift the machine off the ground with the push of a button.



JOYSTICK CONTROL

The intuitive Point and Go joystick enhances ease of operation, allowing new operators to swiftly master steering and rolling speed controls with minimal effort.



CONSISTENT RESULTS

Direct drive on all three drums enhances traction and radius dependent drum speed eliminates roller scuffing and slipping, ensuring a perfect roll on the most challenging contours.



AUTOMATED FEATURES

Precision Pass Alignment lets operators prep for the next pass with a single button press, while the Roller Clean feature simplifies built up debris removal with easy access after rolling.



GreensPro® 1260


The GreensPro 1260 delivers exceptionally smooth and fast greens. The split, overlapping, contour-following smoothing rollers follow undulations delivering exceptionally smooth putting surfaces. The hitch system featuring a QuickLatch coupler makes coupling and de-coupling from the tow vehicle for transporting from green to green unbelievably quick and simple.



OPERATOR COMFORT
Operator platform is fully adjustable for unmatched operator comfort and safety.



CONTOUR FOLLOWING
Independent, articulating smoothing heads follow undulations, preserving natural contours.

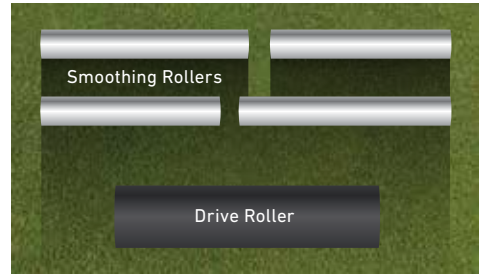

OFFSET SMOOTHING ROLLER DESIGN
Overlapping smoothing rollers eliminate crease marks for a uniform appearance.



MANEUVERABILITY
Converting from roll to transport is a breeze with the QuickLatch™ system, and the remarkably light tongue weight makes coupling and de-coupling from the tow vehicle a snap.



DRIVE SYSTEM
Hydraulic motor drive for ease of operation and reduced maintenance.

SPECIFICATIONS*		GreensPro® 1260, Model 44913		GreensPro® e1700, Model 44914		
ENGINE / POWER	Honda® GX200 5.5 hp (4.1 kW) @3,600 RPM, air-cooled, 4-stroke OHV; mechanically governed		2 Toro HyperCell® lithium-ion batteries standard, configurable up to 4			
RANGE	N/A		Each Toro HyperCell battery covers approximately 90,000 square feet of rolling surface, with the base configuration delivering up to 180,000 square feet of coverage			
FUEL	Unleaded gasoline		N/A			
TRANSMISSION	Hydro gear PG pump		N/A			
DRIVE	Parker hydraulic motor to drive roller		3 direct drive commercial high torque electric motors			
SMOOTHING ROLLERS	3.44" (87.5 mm) diameter 4 split rollers. Overlapping twin steering heads.		3 x 10.42" (26.7 cm) diameter rollers			
TRACTION DRIVE ROLLER	7.24" (183.9 mm) diameter vulcanized rubber coated cylinder, 31.5" (80 cm) long					
ROLLING WIDTH	47.2" (120 cm)		69" (175.3 cm)			
GROUND SPEED	Roll: 0-8 mph (0-12.8 km/h) in either direction		Up to 8 mph (12.8 km/h) in either direction			
CONTROLS/STEERING	Tilt steering wheel adjustable to 40°, directional foot pedals, parking brake, engine stop switch, recoil, choke, fuel shut off, light switch, and hour meter.		Joystick control			
CONTOUR FOLLOWING	Yes		Yes			
GROUND PRESSURE	3.75 psi (0.26 bar)		7.5 psi (0.517 bar)			
SEAT	High-back, adjustable with standard armrests		High-back, adjustable with standard armrest			
TRAILER	Integrated with QuickLatch towing system		Smart Hitch™, drive up and connect system.			
LIFTING TIRES	16 x 6.5-8		18 x 7.5-8			
LIFTING TIRE PRESSURE	15 psi (1.03 bar)		24 psi (1.65 bar)			
WIDTH	OVERALL DIMENSIONS (STORAGE)		OVERALL DIMENSIONS (STORAGE)		OVERALL DIMENSIONS (TOWING)	
	48" (122 cm)		48" (122 cm)		70.5" (179 cm)	
	63" (160 cm)		93" (236 cm)		89" (226 cm)	
LENGTH	68" (173 cm)		47" (119 cm)		54" (137 cm)	
					62" (157 cm)	
HEIGHT					WEIGHT (ROLLING/STORAGE)	
					WEIGHT (TOWING)	
WEIGHT	679 lbs (309 kg)		1,173 lbs (532 kg)		1,235 lbs (560 kg)	
WARRANTY	Two-year warranty. Refer to operator's manual for further details.					

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.





WHEN WE SAY **COUNT ON IT**, WE MEAN IT

Every product that carries the Toro brand is backed by over 100 years of history, innovation and timeless dependability. We never stop investing in research and development to give our customers the latest features. That's why Toro is one of the best-known, most trusted brands in the business—and why your next professional landscape equipment purchase should be a Toro. We also stand behind our products with a worldwide network of knowledgeable dealers for parts and service support.

Real People. Real Support.
Smart Features. Proven Dependability.



toro.com

Worldwide Headquarters
The Toro Company
8111 Lyndale Ave. So.
Bloomington, MN 55420 U.S.A.
Phone: (1) 952 888 8801
Fax: (1) 952 887 8258

©2026 The Toro Company.
All Rights Reserved.

26-210-master

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, design and standard equipment without notice and without incurring obligation. See your distributor for details on all our warranties.



facebook.com/ToroCompany
youtube.com/ToroCompanyEurope
x.com/TheToroCompany

